




ปั๊มหอพัก รุ่นหน้าแปลนเฉพาะปั๊ม หรือพร้อมมอเตอร์ รุ่น CA SERIES / ECM SERIES

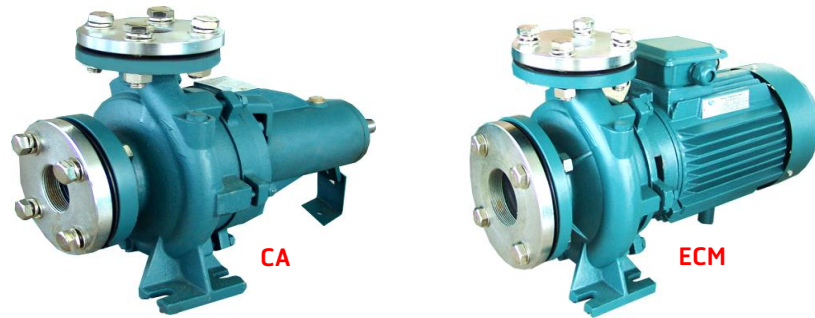

APPLICATIONS : suitable for industrial general services, refrigerated, heated and superheated water circulation in conditioning and heating systems, they are suitable for drinkable water, pressurization units, irrigation, extraction of condensate and low pressure boiler feeding. Suitable also for application in: spray booths, bottle washing plants, swimming pools, etc,

MATERIAL: Standard construction is CA : Casing and impeller in cast iron. Shaft in stainless steel AISI 240
Standard construction is ECM : Casing and impeller in cast iron. Shaft in stainless steel AISI 420

Electric Motors: For ECM Three phase induction motor 3000 Rpm, Protection IP55 . insulation class B. Standard voltage is 220/380V, up to 3kw (4HP) , 380/660V from 4kw (5.5HP) upwards. It is possible the use of motors with higher insulation class F and other voltage and frequency.

| MODEL | | POWER (HP) | Capacity | | HOSE (Inch) | PRICE | | |
|------------------|-----------------|---------------|-----------------------------|-------------|----------------|---------|--|------|
| | | | Q (m ³ /h-l/min) | H(m) | | (ECM) | | (CA) |
| | | 1 PHASE | | | 3 PHASE | 1 PHASE | | |
| ECM 50-32-160B | CA 50-32-160B | 3 | 0 - 300 | 26.0 - 18.8 | 50 x 32 | | | |
| ECM 50-32-160A | CA 50-32-160A | 4 | 0 - 400 | 36.7 - | | | | |
| ECM 50-32-200B | CA 50-32-200B | 7.5 | 0 - 600 | 53.0 - | | | | |
| ECM 65-40-125A | CA 65-40-125A | 4 | 0 - 600 | 24.4 - 12.3 | 65 x 40 | | | |
| ECM 65-40-160B | CA 65-40-160B | 4 | 0 - 800 | 30.0 - | | | | |
| ECM 65-40-160A | CA 65-40-160A | 5.5 | 0 - 800 | 35.3 - | | | | |
| ECM 65-40-200A | CA 65-40-200A | 10 | 0 - 800 | 57.0 - | | | | |
| ECM 65-50-160B | CA 65-50-160B | 7.5 | 0 - 1300 | 32.0 - 14.8 | 65 x 50 | | | |
| ECM 65-50-160A | CA 65-50-160A | 10 | 0 - 1300 | 40.0 - | | | | |
| ECM 65-50-200A | CA 65-50-200A | 20 | 0 - 1300 | 58.6 - | | | | |
| ECM 80-65-125B | CA 80-65-125B | 7.5 | 0 - 1800 | 23.0 - | 80 x 65 | | | |
| ECM 80-65-125A | CA 80-65-125A | 10 | 0 - 1800 | 27.0 - 18.0 | | | | |
| ECM 80-65-160B | CA 80-65-160B | 15 | 0 - 2400 | 36.0 - 21.1 | | | | |
| ECM 80-65-160A | CA 80-65-160A | 20 | 0 - 2200 | 42.0 - | | | | |
| ECM 100-80-160A | CA 100-80-160A | 30 | 0 - 3750 | 37.0 - | 100 x 80 | | | |
| ECM 100-80-200B | CA 100-80-200B | 30 | 0 - 3250 | 45.0 - | | | | |
| ECM 125-100-200C | CA 125-100-200C | 30 | 0 - 4167 | 38.0 - | 125 x 100 | | | |
| ECM 125-100-200B | CA 125-100-200B | 40 | 0 - 4167 | 43.0 - | | | | |